




Hello and congratulations on your purchase of a CAMTuning Calibration for your Toyota 2.4 Turbo.

Follow the following steps to provide the necessary information to CAMTuning so that your specific calibration can be sent out.

1. Update your Accessport using Accessport manager and the included USB to Micro USB cable. You can download it at the following link: [ACCESSPORT MANAGER](#)
2. Install your Cobb Accessport Bypass harness as demonstrated in the following link: [TOYOTA ACCESSPORT INSTALL](#)
3. Install the Cobb Accessport to your vehicle:
 1. Select install and follow the on screen instructions.
 2. Choose Stage0 - Simulated Stock TCM v100. Pay special attention to the instructions on the time to wait after key off during each step. The check engine light will come on during the install, as well as other system warnings. This is normal, and will be reset during the final steps. If you have Toyota Care, they may call you to let you know you had a system malfunction.

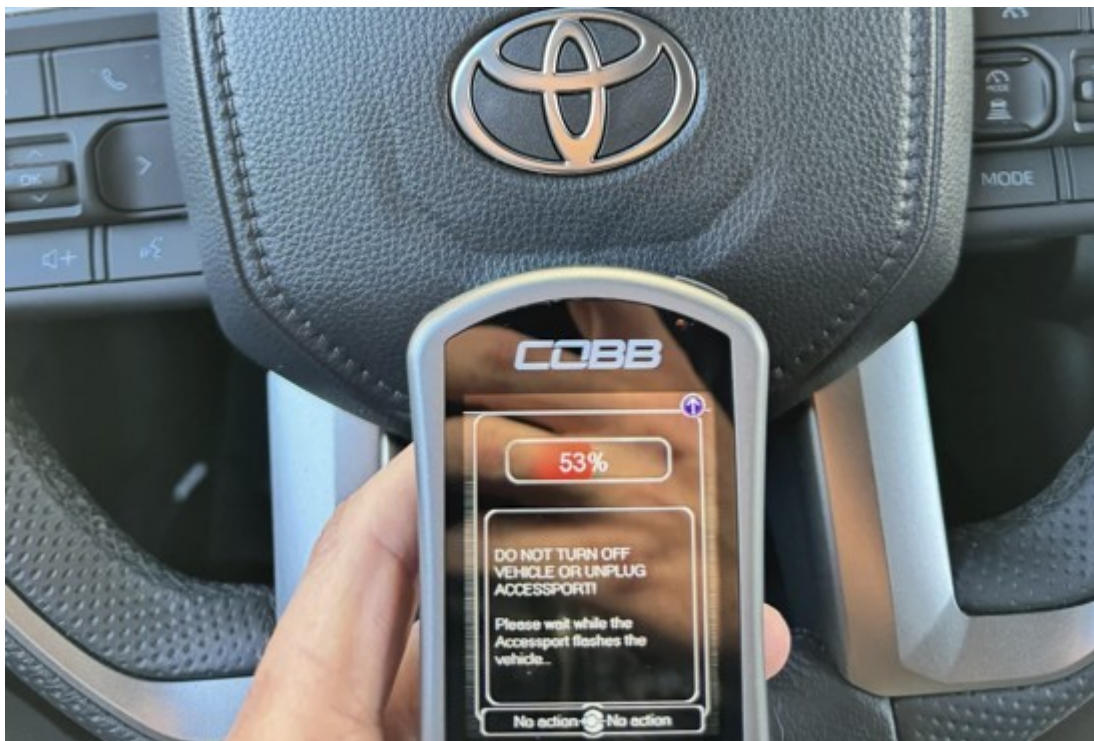

4. At this time, you can remove the Bypass harness and store it. Make sure to replace the CAN terminator block at the end of the factory harness.
5. Connect the AP to your computer again and select AP info. You can copy this box and paste it into an email to cam@camtuningperformance.com. Put “SXTB Bundle Accessport Details” in the email subject line. Include your full name in the email as well. You will receive your map and installation instructions within 3 business days.

