



# Elantra N CPLT Intake

## INSTALLATION INSTRUCTIONS



### Tools needed:


- Ratchet
- 10mm socket
- 8mm socket
- Pliers
- Flat head screwdriver

### Vehicle Fitment:

- 2022+ Elantra N / Avante N / I30 N Sedan




1. Using a small flat head screwdriver, pop up the clips on the airbox scoop.

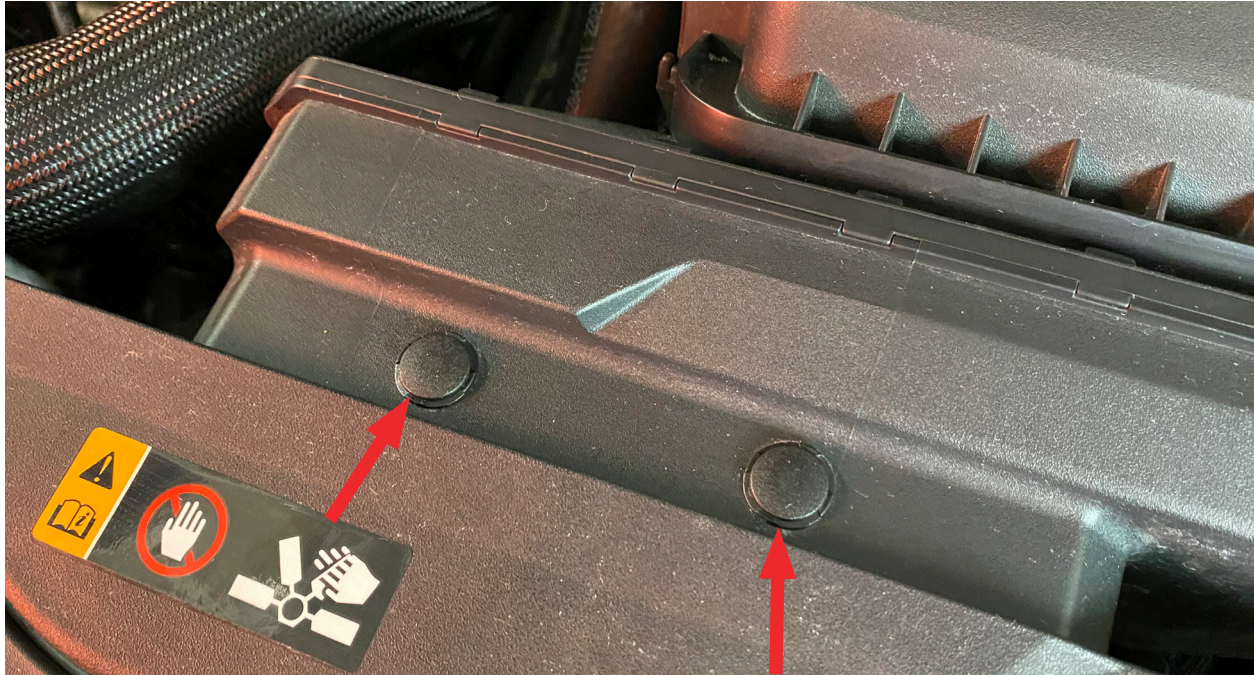



2. Starting at the airbox, loosen the intake tubing clamp and remove the bypass valve hose. Then move to the back of the intake tube / loosen the clamp and remove the valve cover breather hose. The clamp screw heads are 10mm.

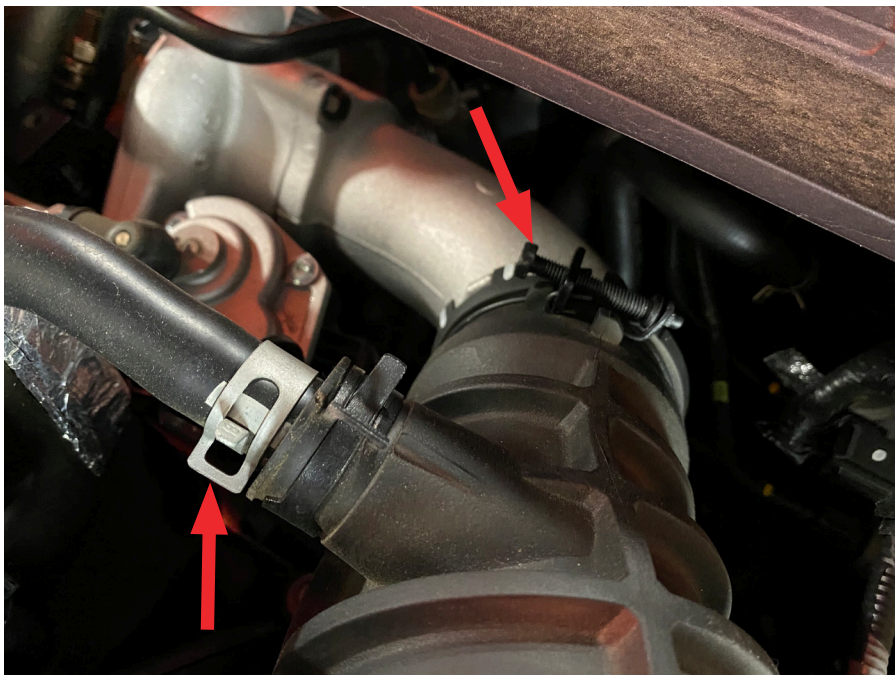





3. Remove the intake tube by pulling it off of the airbox and the turbo inlet.






4. There are 3 bolts that hold the airbox down. Two between the box and the battery and one to the driver side next to the ECU. They are 10mm. Remove those 3 bolts.

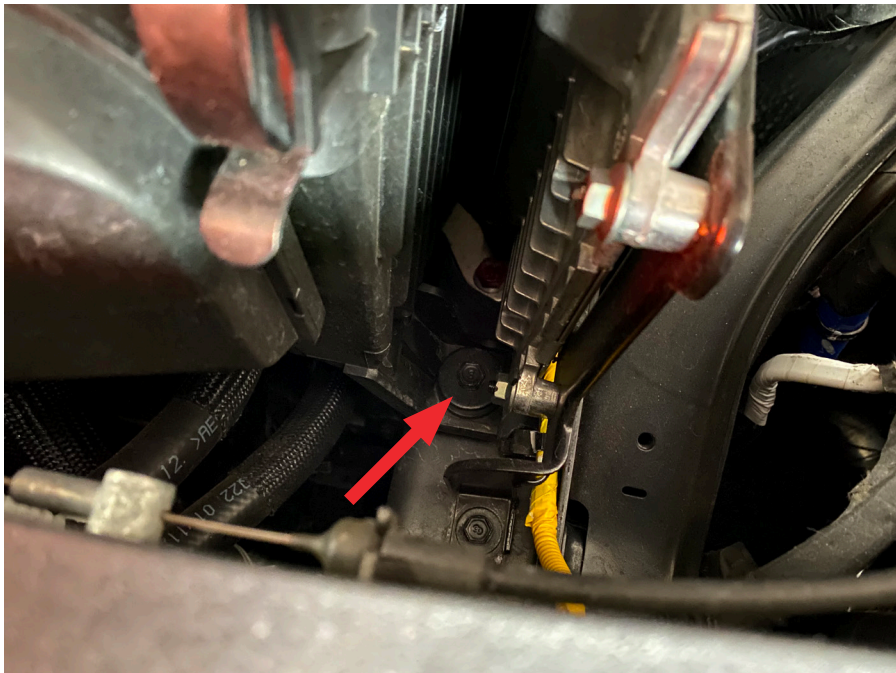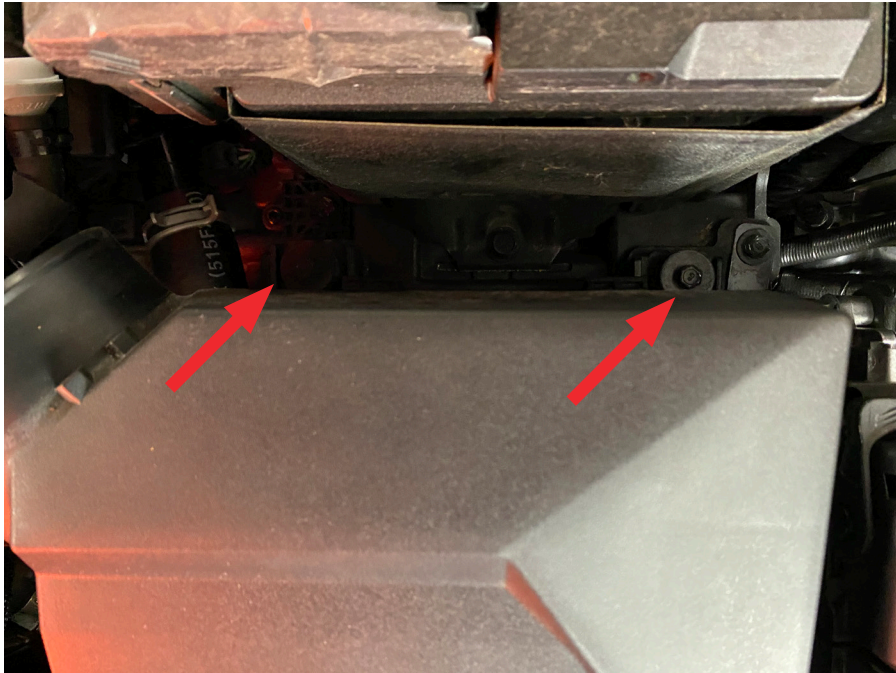




5. Pull the airbox up and out of the engine bay.

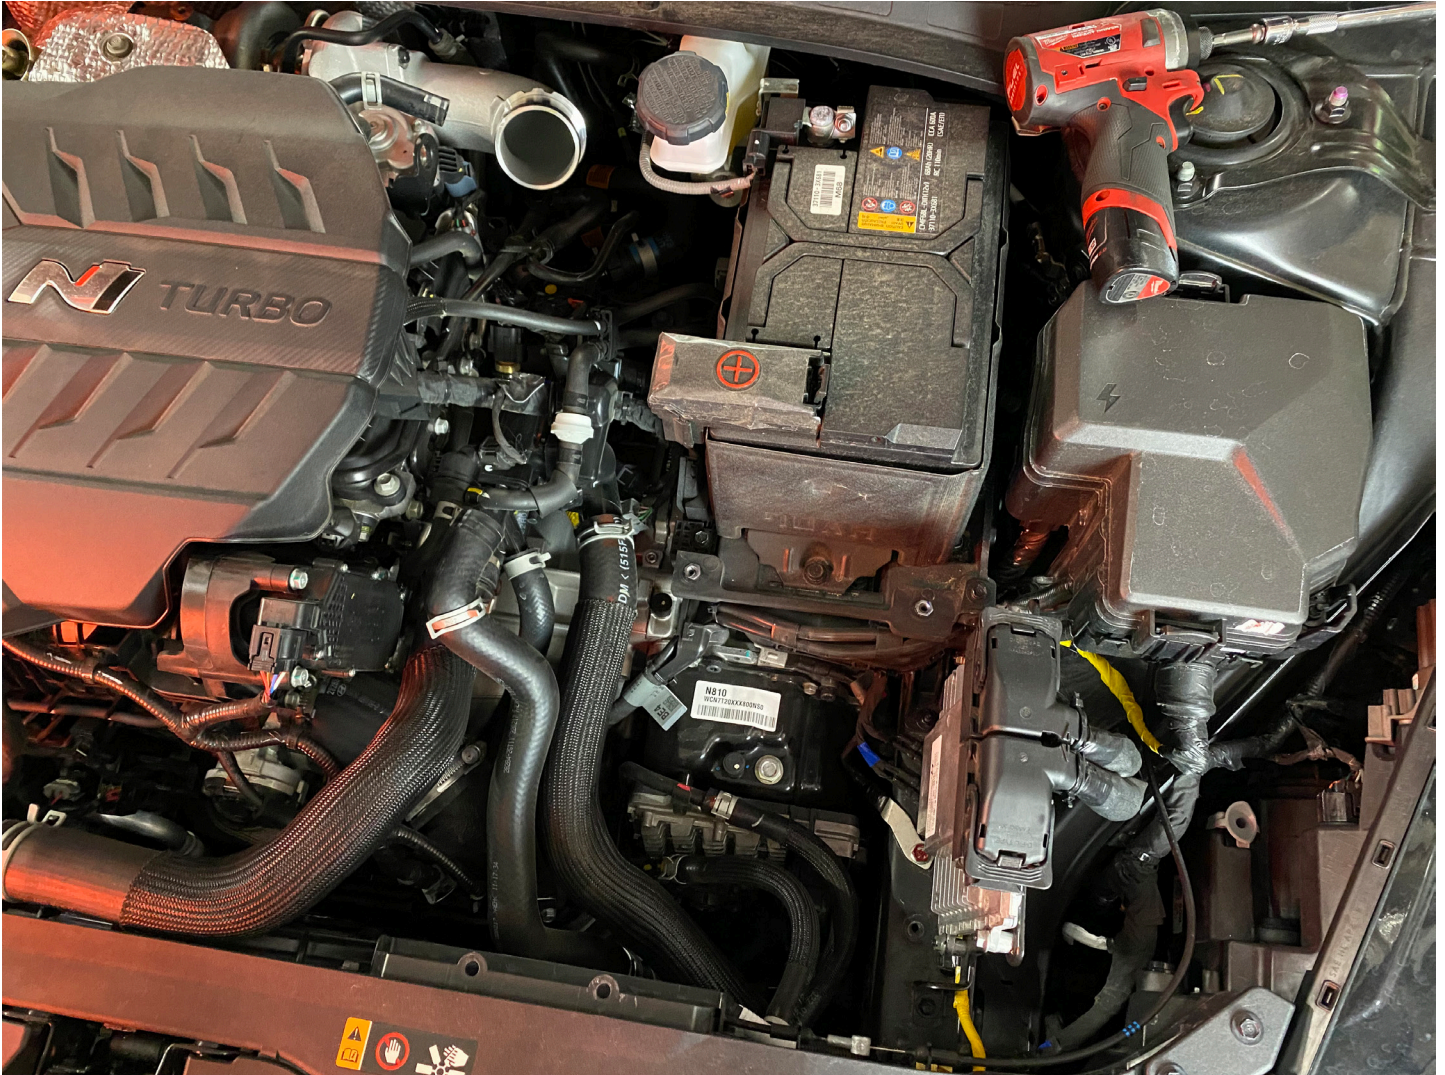



6. Take the supplied stud mounts and install them in the locations shown below. Install them by hand and then snug them slightly with a crescent wrench on the flat sides.

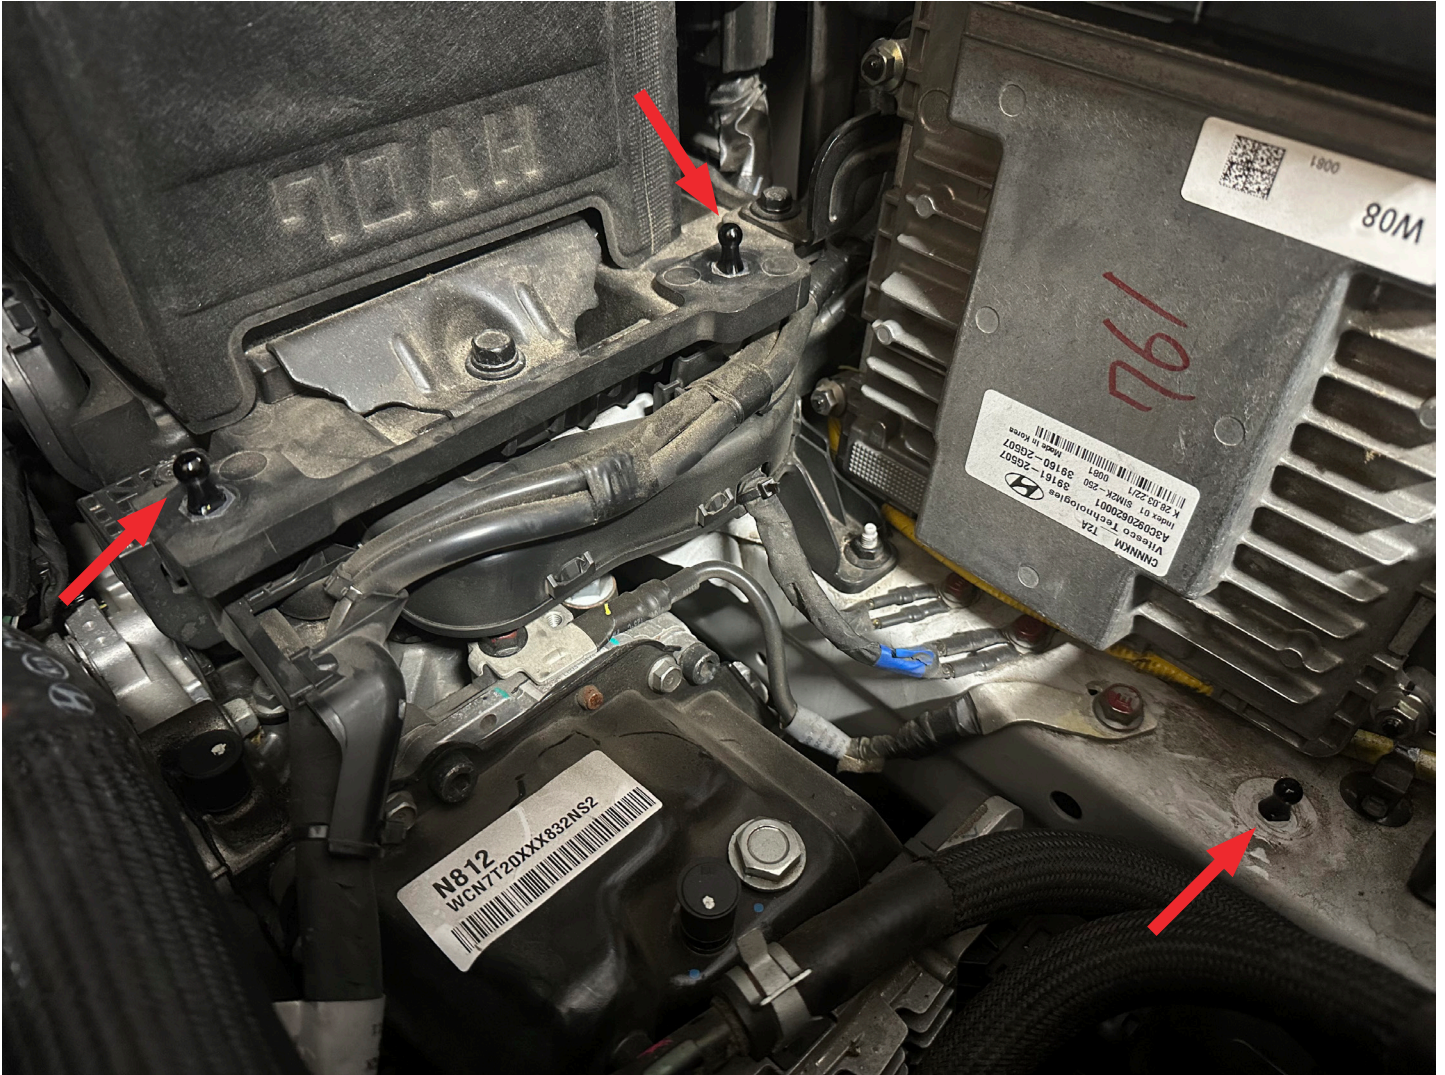






7. Install the SXTH reducer hose on to the turbo inlet. Tighten the smaller turbo inlet clamp all the way down, about 1/4 turn past hand tight. Leave the larger clamp loose on the end of the hose as shown.








8. Install the SXTH intake tube and rotate it as such the hose fitting matches the angle of the hose. Leave the hose clamp loose for now, just tight enough to keep the tube from falling.

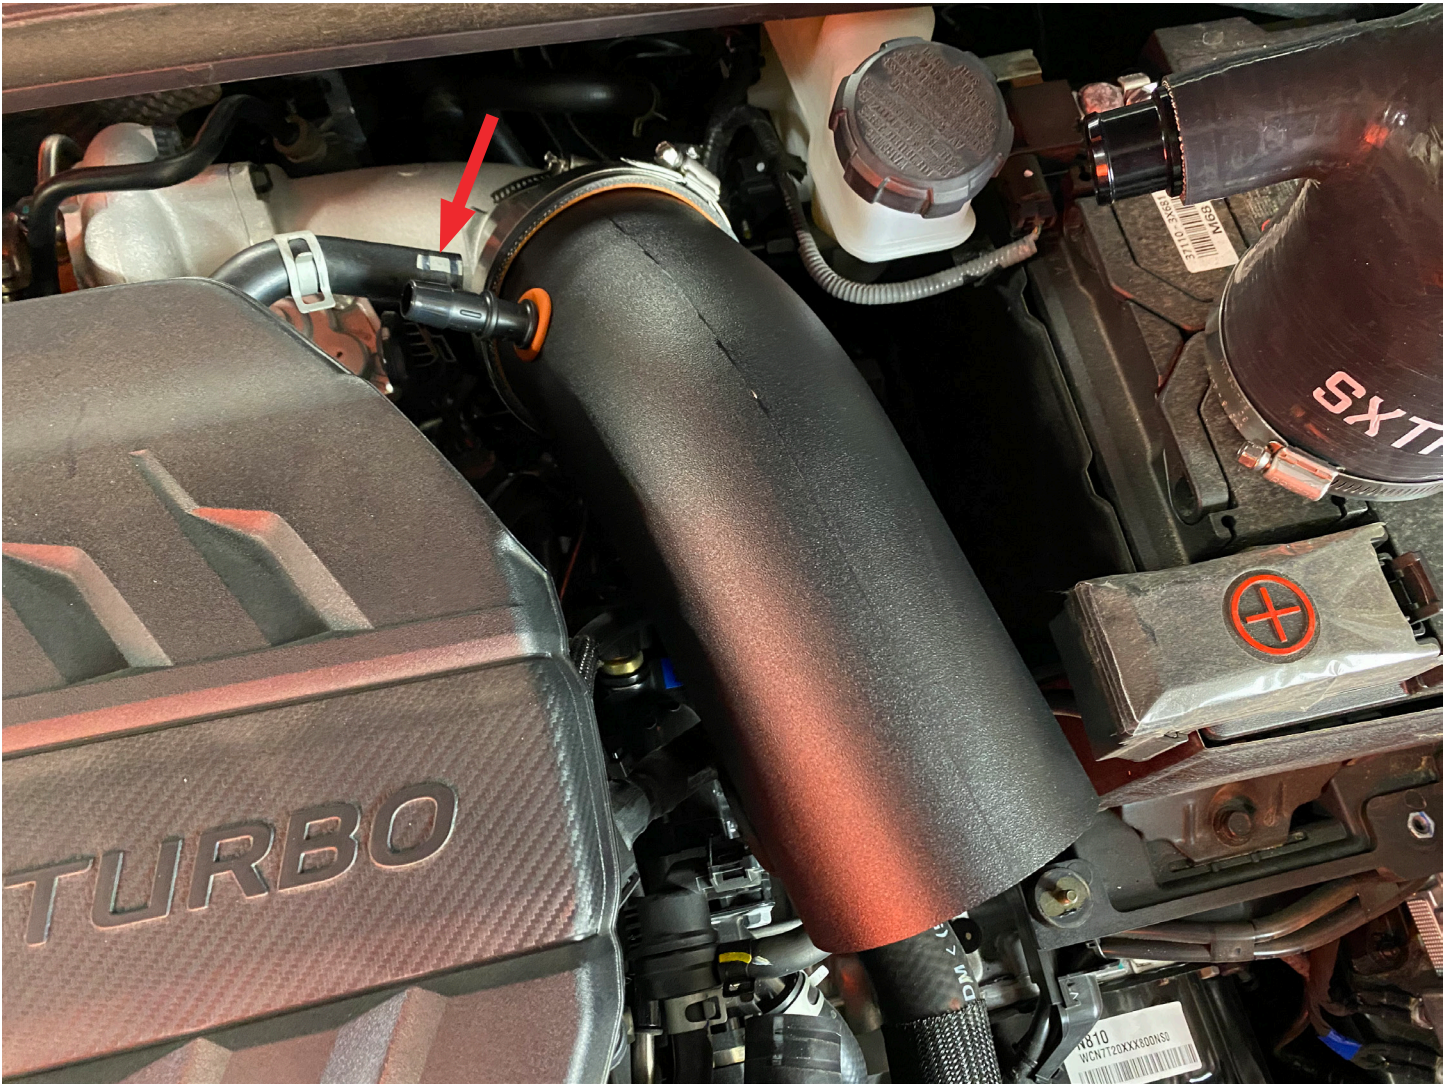






9. Install the SXTH airbox into the engine bay. Make sure the rubber mounts in the brackets are installed as shown below. Then lower the box on to the black studs installed previously. The first one to push downward to pop the rubber on to the stud should be the front one next to the ECU. Then push the box down in the back to have the rubber mounts engage the studs in the back.

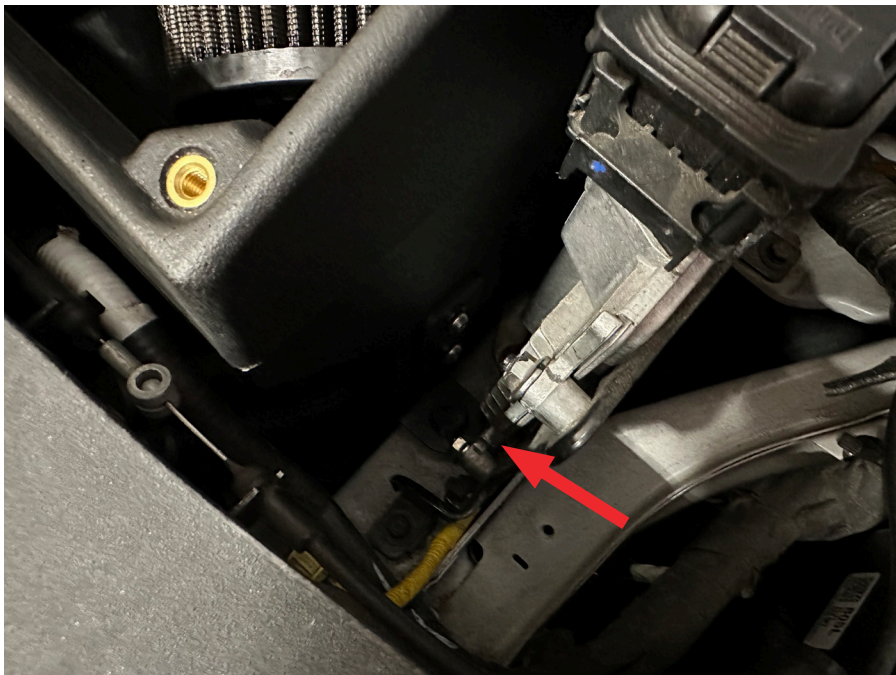





10. Install the OEM pop clips into the air box once the holes are lined up.

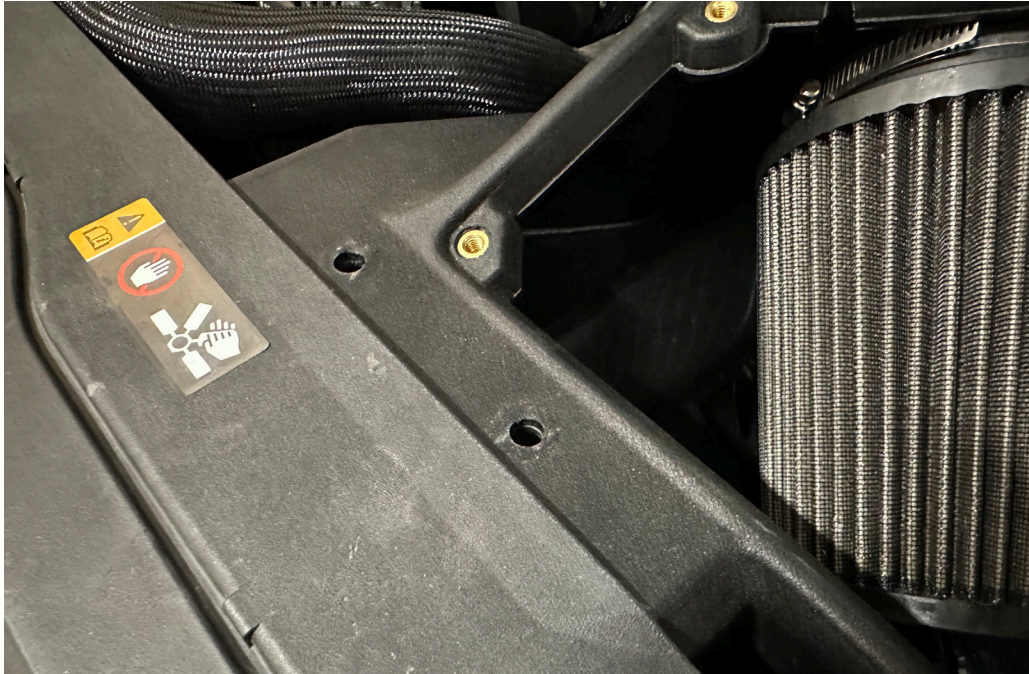





11. Remove the engine cover and then remove the OEM Crankcase Ventilation (CV) hose by removing the clamp on the valve cover and pulling the hose off of the valve cover. Install the SXTH CV Hose assembly in place of the OEM CV hose. Tighten the hose clamps with a flat head screw driver. Then re-install the engine cover. \*\*\*MAKE SURE THE ARROW ON THE VALVE IS POINTING TO THE INTAKE SYSTEM\*\*\*

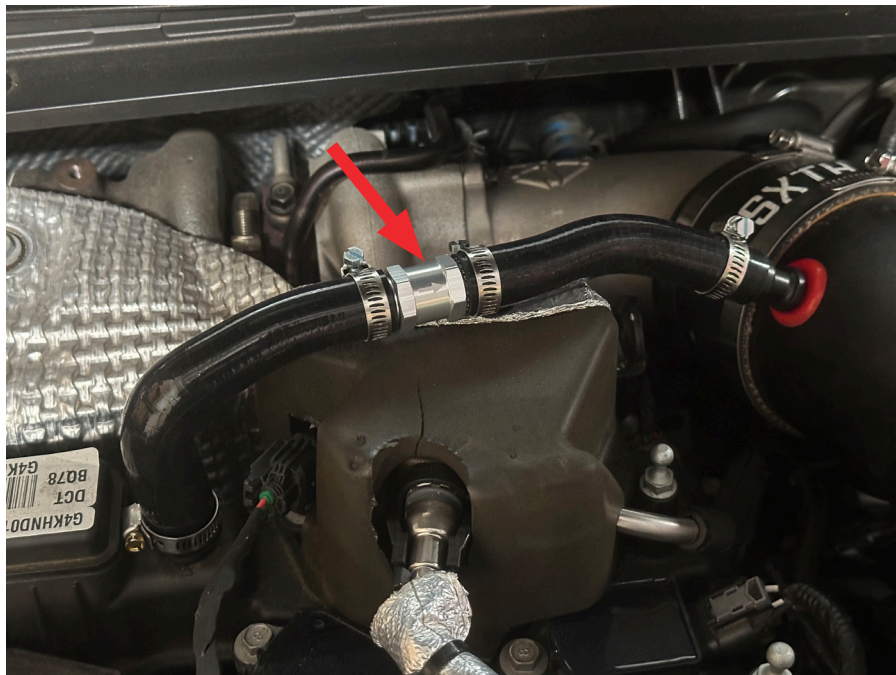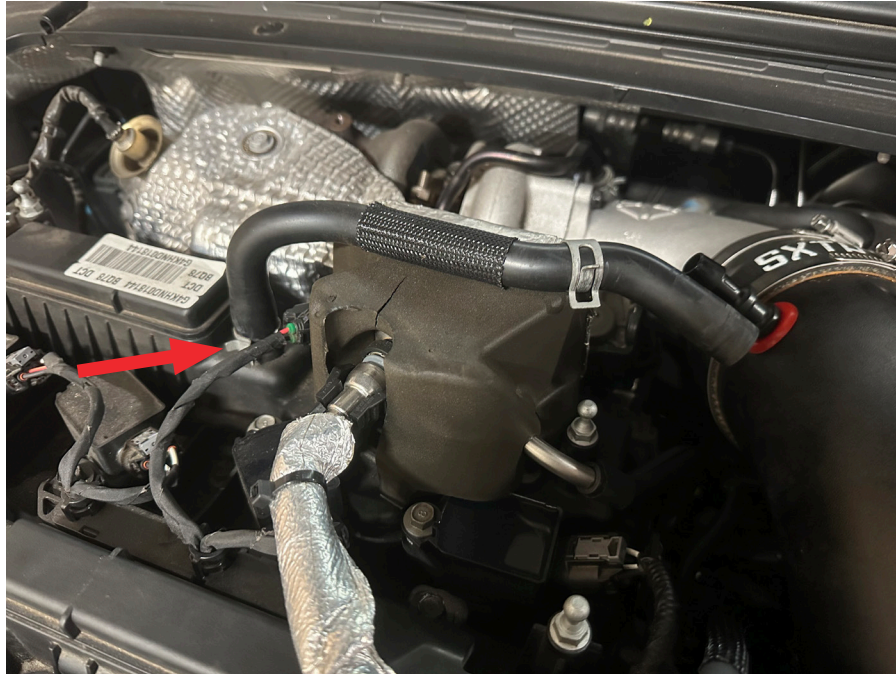





12. Install the SXTH elbow coupler on to the tube and airbox. Line up the elbow so the bypass valve hose can be installed. Attach the bypass valve hose and clamp, then tighten the hose clamps. DO NOT overtighten these clamps as you can damage the plastic. 1/4 turn past hand tight is enough. When all hose clamps are tight, install valve cover hose and clamp.







13. Double check all connections and careful with that nice clear lid! Enjoy your new intake!







#### Legal Disclaimer:

SXTH Element Engineering, LLC makes no warranties whatsoever, expressed or implied, oral or written to any purchasers, except the limited warranty described on our website. SXTH Element Engineering, LLC is hereby specifically excluded from any implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by SXTH Element Engineering, LLC agree to hold harmless and indemnify SXTH Element Engineering, LLC from any and all claims arising from their use. Failure to receive notice of any limitations or the limitations contained in this disclaimer shall not serve to extend liability to SXTH Element Engineering, LLC for any claims arising out of use of its products.

